
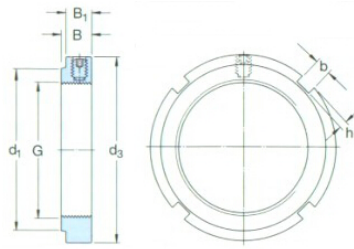


KMFE lock nut with locking pin



select	Inquiry	Designation		Sunk screw (Nm)		Dimensions(mm)						Nuts required for dismounting	Breakout torque(Nm)	Weight kg	
		Lock nut	Appropriate hook spanners	Dimensions	Advised breakout torque	G	d1	d3	B	B1	b	h			Sta
KMFE4	HN4	M5	4	M 20×1	26	32	9,5	8,5	4	2	24	28	0,031		
KMFE5	HN5	M5	4	M 25×1,5	31	38	10,5	8,5	5	2	31,5	35	0,042		
KMFE6	HN6	M5	4	M 30×1,5	36	45	10,5	8,5	5	2	36,5	42	0,058		
KMFE7	HN7	M5	4	M 35×1,5	42,5	52	11,5	8,5	5	2	50	49	0,080		
KMFE8	HN8	M6	8	M 40×1,5	47	58	13	10	6	2,5	62	80	0,11		
KMFE9	HN9	M6	8	M 45×1,5	53	65	13	10	6	2,5	78	94	0,14		
KMFE10	HN10	M6	8	M 50×1,5	57,5	70	14	11	6	2,5	91,5	100	0,16		
KMFE11	HN11	M6	8	M 55×2	64	75	14	11	7	3	91,5	110	0,18		
KMFE12	HN12	M6	8	M 60×2	69	80	14	11	7	3	95	120	0,19		
KNIFE13	HN13	M6	8	M 65×2	76	85	15	12	7	3	108	130	0,23		
KMFE14	HN14	M6	8	M 70×2	79	92	15	12	8	3,5	118	140	0,26		
KMFE15	HN15	M6	8	M 75×2	85	98	16	13	8	3,5	134	150	0,32		
KMFE16	HN16	M8	18	M 80×2	91,5	105	18	15	8	3,5	173	300	0,42		
KMFE17	HN17	M8	18	M 85×2	98	110	19	15	8	3,5	190	315	0,46		
KMFE18	HN18	M8	18	M 90×2	102	120	19	15	10	4	216	335	0,58		
KMFE19	HN19	M8	18	M 95×2	110	125	20	16	10	4	236	355	0,66		
KMFE20	HN20	M8	18	M 100×2	112	130	21	17	10	4	255	370	0,71		
KMFE21	HN21	M8	18	M 105×2	112	140	21	17	12	5	290	390	0,85		
KMFE22	HN22	M8	18	M 110×2	122	145	21,5	17,5	12	5	310	410	0,93		
KMFE23	TMFN23-30	M10	35	M 115×2	126	150	25	20	12	5	315	645	1,11		
KMFE24	TMFN23-30	M10	35	M 120×2	130	155	26	20	12	5	340	675	1,16		
KMFE25	TMFN23-30	M10	35	M 125×2	136	160	27	21	12	5	360	700	1,26		
KMFE26	TMFN23-30	M10	35	M 130×2	141	165	28	21	12	5	365	730	1,33		