


## Rigid Coupling

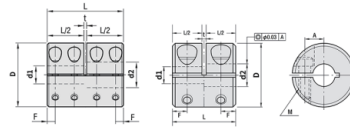

select	Inquiry	Type	D	L	t	L/2	M	Rated torque (N * m)	Maximum torque (N * m)	Maximum speed (rpm)	Inertia moment (kg * m <sup>2</sup> )	Locking torque (N * m)
GX2025	20	25	1	12	2-M3	10	20	31000	$3.4 \times 10^{-7}$	3		
GX2035	20	35	1	17	4-M3	10	20	31000	$3.4 \times 10^{-7}$	3		
GX2530	25	30	1	14.5	2-M4	12	24	25000	$9.2 \times 10^{-7}$	7		
GX2535	25	35	1	17	4-M3	12	24	25000	$3.4 \times 10^{-6}$	3		
GX3240	32	40	1	19.5	2-M5	15	30	19000	$1 \times 10^{-5}$	10		
GX3245	32	45	1	22	4-M4	15	30	19000	$1 \times 10^{-5}$	7		
GX4045	40	45	1	22	2-M5	19	38	15000	$1.5 \times 10^{-5}$	10		
GX4050	40	50	1	24.5	4-M5	19	38	15000	$2.4 \times 10^{-5}$	10		
GX4560	45	60	2	29	4-M6	30	60	13500	$4.5 \times 10^{-5}$	15		
GX5055	50	55	2	26.5	4-M6	45	90	12000	$7.0 \times 10^{-5}$	15		